



# ConeJet® VisiFlo® Hollow Cone Spray Tips

## Typical Applications:

### Excellent: Post-Emerge Contact Herbicides, Fungicides and Insecticides —


To assure finely atomized spray droplets reach target areas.

**Good:** For use with defoliants and foliar fertilizers at pressures 40 PSI (3 bar) and above.


## Features:

- Maximum operating pressure 300 PSI (20 bar). Spray angle is 80° at 100 PSI (7 bar).
- Finely atomized spray pattern provides thorough coverage.
- Longer wear life.
- Resists corrosion.


- Accepts more abrasive pesticide formulation.
- Polypropylene body for use with corrosive materials and ceramic insert.
- Popular nozzle sizes fit most sprayers.
- Incorporates ISO color-coding scheme.

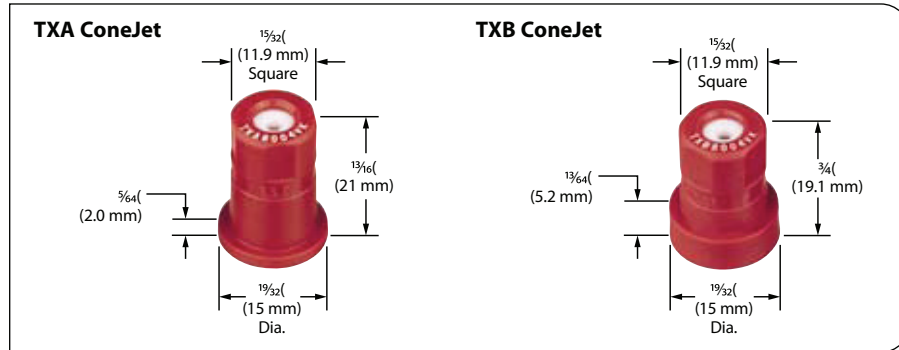

PSI	CAPACITY ONE NOZZLE IN GPM	CAPACITY ONE NOZZLE IN OZ./MIN.	GPA  209								
			4 MPH	5 MPH	6 MPH	8 MPH	10 MPH	12 MPH	15 MPH	20 MPH	
TXA800050VK TXB800050VK (100)	40	0.050	6	3.7	3.0	2.5	1.9	1.5	1.2	0.99	0.74
	60	0.060	8	4.5	3.6	3.0	2.2	1.8	1.5	1.2	0.89
	80	0.068	9	5.0	4.0	3.4	2.5	2.0	1.7	1.3	1.0
	100	0.075	10	5.6	4.5	3.7	2.8	2.2	1.9	1.5	1.1
125	0.082	10	6.1	4.9	4.1	3.0	2.4	2.0	1.6	1.2	
TXA800067VK TXB800067VK (50)	40	0.067	9	5.0	4.0	3.3	2.5	2.0	1.7	1.3	0.99
	60	0.080	10	5.9	4.8	4.0	3.0	2.4	2.0	1.6	1.2
	80	0.091	12	6.8	5.4	4.5	3.4	2.7	2.3	1.8	1.4
	100	0.10	13	7.4	5.9	5.0	3.7	3.0	2.5	2.0	1.5
125	0.11	14	8.2	6.5	5.4	4.1	3.3	2.7	2.2	1.6	
TXA8001VK TXB8001VK (50)	40	0.10	13	7.4	5.9	5.0	3.7	3.0	2.5	2.0	1.5
	60	0.12	15	8.9	7.1	5.9	4.5	3.6	3.0	2.4	1.8
	80	0.14	18	10.4	8.3	6.9	5.2	4.2	3.5	2.8	2.1
	100	0.15	19	11.1	8.9	7.4	5.6	4.5	3.7	3.0	2.2
125	0.17	22	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	
TXA80015VK TXB80015VK (50)	40	0.15	19	11.1	8.9	7.4	5.6	4.5	3.7	3.0	2.2
	60	0.18	23	13.4	10.7	8.9	6.7	5.3	4.5	3.6	2.7
	80	0.21	27	15.6	12.5	10.4	7.8	6.2	5.2	4.2	3.1
	100	0.23	29	17.1	13.7	11.4	8.5	6.8	5.7	4.6	3.4
125	0.26	33	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	
TXA8002VK TXB8002VK (50)	40	0.20	26	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0
	60	0.24	31	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6
	80	0.28	36	21	16.6	13.9	10.4	8.3	6.9	5.5	4.2
	100	0.31	40	23	18.4	15.3	11.5	9.2	7.7	6.1	4.6
125	0.34	44	25	20	16.8	12.6	10.1	8.4	6.7	5.0	
TXA8003VK TXB8003VK (50)	40	0.30	38	22	17.8	14.9	11.1	8.9	7.4	5.9	4.5
	60	0.37	47	27	22	18.3	13.7	11.0	9.2	7.3	5.5
	80	0.42	54	31	25	21	15.6	12.5	10.4	8.3	6.2
	100	0.47	60	35	28	23	17.4	14.0	11.6	9.3	7.0
125	0.53	68	39	31	26	19.7	15.7	13.1	10.5	7.9	
TXA8004VK TXB8004VK (50)	40	0.40	51	30	24	19.8	14.9	11.9	9.9	7.9	5.9
	60	0.49	63	36	29	24	18.2	14.6	12.1	9.7	7.3
	80	0.56	72	42	33	28	21	16.6	13.9	11.1	8.3
	100	0.63	81	47	37	31	23	18.7	15.6	12.5	9.4
125	0.70	90	52	42	35	26	21	17.3	13.9	10.4	

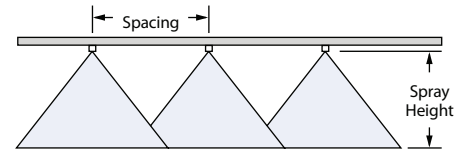

## Optimum Spray Height



See pages 173–187 for useful formulas and information.

## How to order:

Specify tip number.

Example:

TXA8004VK – Ceramic with VisiFlo color-coding

**Note:** Always double check your application rates. Tabulations are based on spraying water at 70°F (21°C).